




OWNER'S MANUAL

SUPER BULLET TWEETER

RS-TA92LD

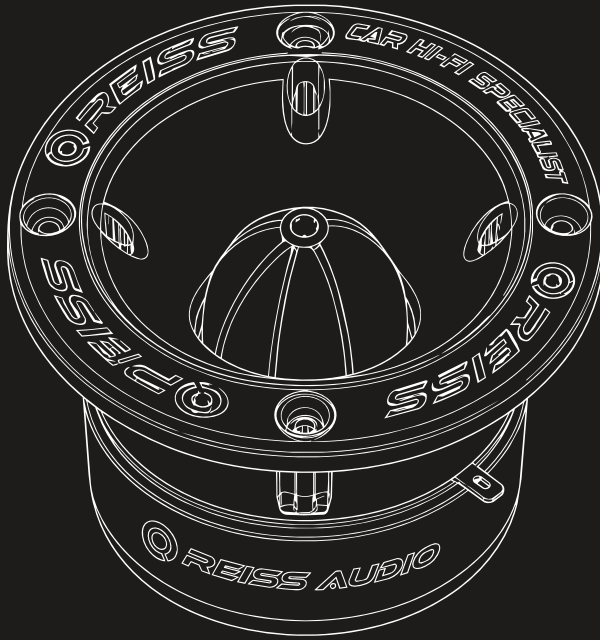

Since 1985
TURKISH ENGINEERING

LED MULTICOLOR

Specifications

Nominal Diameter	118mm
Nominal Impedance	6 Ω
RMS Power Handling	250 Watts
Maximum Power Handling	500 Watts
Sensitivity (1w/1m)	108dB
Frequency Response	2.5KHz - 20KHz
Recommended Hi Pass Crossover	3000Hz
Voice Coil Diameter	44.4mm (1.75")
Voice Coil Former Material	Kapton
Winding Material	CCAW
Frame Material	Transparent Polycarbonate
Magnet Weight	Ferrite 16oz


Measurements

Overall Diameter	118mm (4.65")
Front Mount Baffle Cutout	89mm (3.50")
Mounting Depth	72mm (2.83")
Overall Depth	78mm (3.07")
Net Weight	1.3 Kg


Shipping Info

Gross Single Unit Weight	1.4 Kg
Single Unit Box Dimensions W x L x H	14 x 12.6 x 87 cm
Quantity of Units in Master Carton	8 pieces
Gross Master Carton Weight	12 Kg
Master Carton Dimensions W x L x H	29.8x 27x 20.1 cm

SUPER BULLET TWEETER

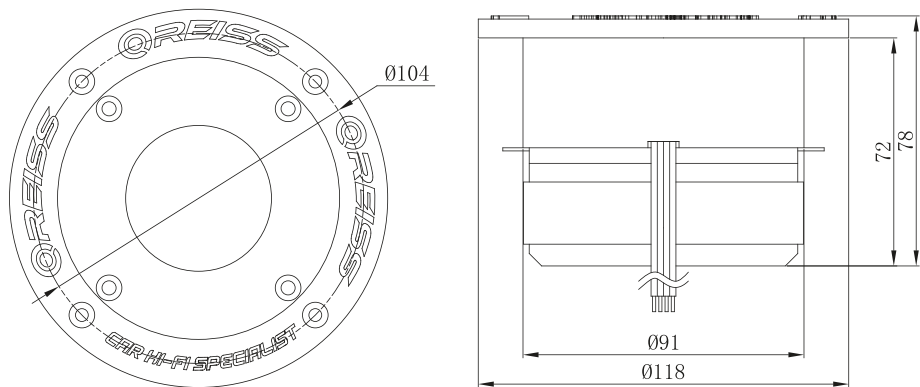

SPL vs. FREQ

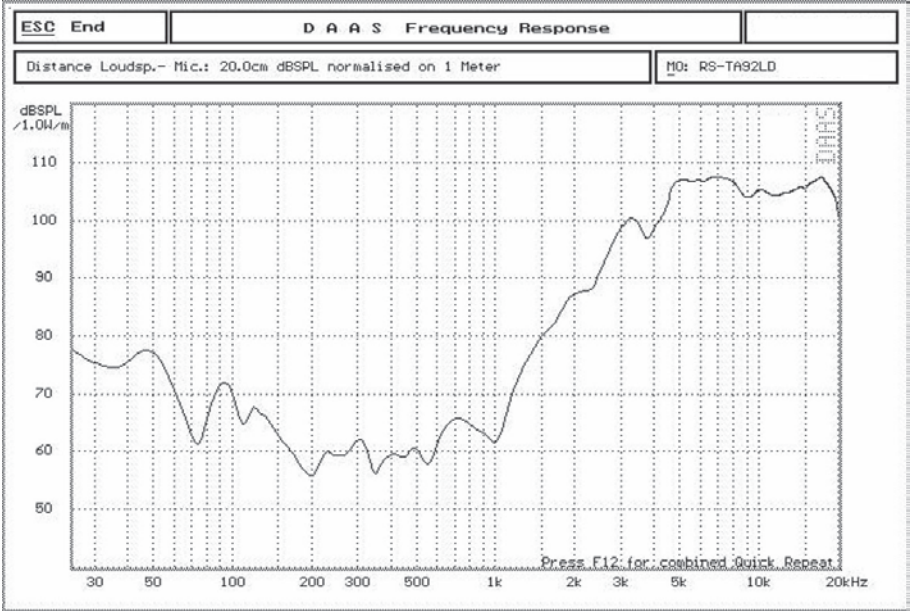



**FOR MORE INFORMATION
PLEASE VISIT**

Join Our Community



www.reissaudio.com.tr