REISS

KULLANMA KILAVUZU



RS-SPL SERİSİ

38/46 CM SUBWOOFER

Lütfen kullanma kılavuzunu dikkatlice okumadan cihazınızı kullanmayınız.

Değerli Müşterimiz,
Öncelikle kalitenin öncüsü olan **REISS AUDIO** markalı cihazımızı tercih ettiğiniz için teşekkür ederiz.


Modern tesislerde üretilen ve titiz kalite kontrolünden geçirilmiş olan cihazınızın size en iyi verimi sunabilmesi için, **bu kılavuzun tamamını cihazınızı kullanmadan önce dikkatle okumanızı ve bir başvuru kaynağı olarak saklamanızı rica ederiz.**


www.**reissaudio**.com.tr

RS-SPL15.D1/D2 15" CAR SUB
RS-SPL18.D1/D2 18" CAR SUB

Features:

Solid massive die cast basket;
Kevlar woven composite paper cone;
Red stitched R-flex foam surround;
4" 4-layer flat aluminum wire voice coil;
Black polycotton 6-pc spiders;
Triple stacked 504oz Strontium magnets;
10 gauge power cable direct connecting;
Rubber magnet boot and rubber gasket;
DVC1-ohm or DVC 2-ohm Impedance;
5000W RMS power and 10000W MAX power

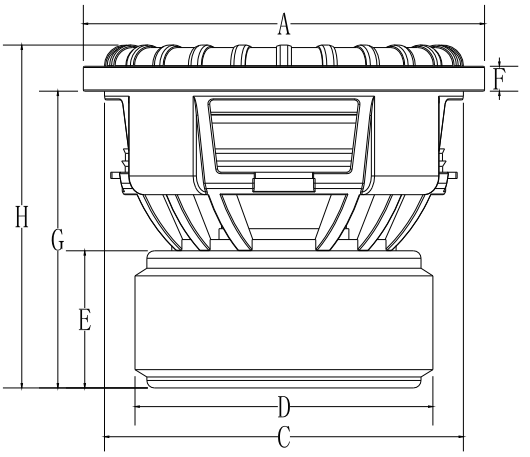

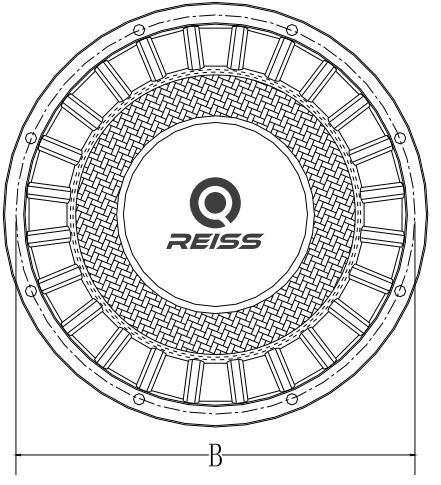

RS-SPL series subwoofers dimentions

Dimensions	Value	RS-SPL15.D1/D2	RS-SPL18.D1/D2
Diameter A	mm	395	470
Diameter B	mm	375	442
Diameter C	mm	350	422
Diameter D	mm	260	260
Depth E	mm	115	115
Depth F	mm	18	18
Depth G	mm	228	265
Depth H	mm	264	306
Vd	L	13.5	15.9

RS-SPL series subwoofer T/S Parameters

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	n	SPLo	Vas	Cms	Mms	Mmd	Xmax	Xmech	AGH
MODLE	ohm	ohm	Hz	msqM	Tm					dB	L	μm/N	g	g	±mm	mm	mm
RS-SPL15.D1	0.5	0.4	35.2	77.9	9.21	4.855	0.480	0.437	0.337	87.3	38.3	44.4	460.2	447.7	27.5	45	25
RS-SPL15.D1	2	1.6	34.5	77.9	18.9	4.394	0.489	0.440	0.296	86.7	36.6	42.4	502.3	489.8	27.5	45	25
RS-SPL15.D2	1	0.8	31.9	77.9	13.3	4.413	0.501	0.450	0.242	85.8	38.6	44.7	556.4	543.9	27.5	45	25
RS-SPL15.D2	4	3.2	32.3	77.9	26.8	4.123	0.478	0.428	0.269	85.3	39.6	45.9	530.9	518.4	27.5	45	25
RS-SPL18.D1	0.5	0.4	32.7	113.4	7.88	5.280	0.643	0.573	0.467	88.7	89.1	48.8	486.4	464.5	27.5	45	25
RS-SPL18.D1	2	1.6	33.6	113.4	17.3	4.494	0.610	0.537	0.537	88.6	88.5	48.2	485.3	463.3	27.5	45	25
RS-SPL18.D2	1	0.8	32.9	113.4	11.9	4.938	0.554	0.498	0.564	89.5	90.6	49.6	471.4	449.4	27.5	45	25
RS-SPL18.D2	4	3.2	32.5	113.4	24.8	4.257	0.530	0.471	0.551	89.4	88.0	48.2	498.0	476.1	27.5	45	25

*Above parameters are tested after each subwoofer was break-ined with 95V 50Hz input with 2ohm load (DVC1 version) and 80V 70Hz input with 1ohm load (DVC2 version) for 8 hours.

*AGH: Air Gap Height.

*Due to continuous pursuit of performance, specifications change without prior notice.

REISS

KULLANMA KILAVUZU



RS-SPL SERİSİ

38/46 CM SUBWOOFER

İTHALATÇI FİRMA & SERVİS BİLGİLERİ

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş

Mahmutbey Mah. Küçük Halkalı Cad.No:9 Bağcılar-İstanbul

Tel:0212-447 02 02 - 659 07 22

www.**reissaudio**.com.tr