REISS

KULLANMA KILAVUZU



RS-SQX SERİSİ

38/46 CM SUBWOOFER

Lütfen kullanma kılavuzunu dikkatlice okumadan cihazınızı kullanmayınız.

Değerli Müşterimiz,
Öncelikle kalitenin öncüsü olan **REISS AUDIO** markalı cihazımızı tercih ettiğiniz için teşekkür ederiz.


Modern tesislerde üretilen ve titiz kalite kontrolünden geçirilmiş olan cihazınızın size en iyi verimi sunabilmesi için, **bu kılavuzun tamamını cihazınızı kullanmadan önce dikkatle okumanızı ve bir başvuru kaynağı olarak saklamanızı rica ederiz.**


www.**reissaudio**.com.tr

RS-SQX15.D1/D2 15" CAR SUB
RS-SQX18.D1/D2 18" CAR SUB

Features:

Solid massive die cast basket;
Kevlar fiber enhanced paper cone
Red stitched R-flex foam surround;
3" 4-layer flat aluminum wire voice coil;
Black polycotton 4-pc spiders;
Triple stacked 300oz Strontium magnets;
10 gauge power cable direct connecting;
Rubber magnet boot and rubber gasket;
DVC 1-ohm or DVC 2-ohm Impedance;
2000W RMS power and 4000W MAX power

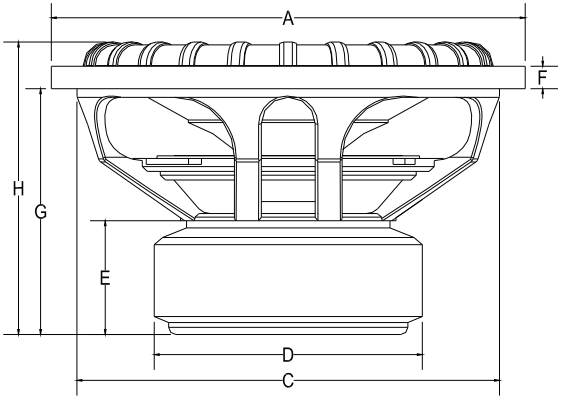

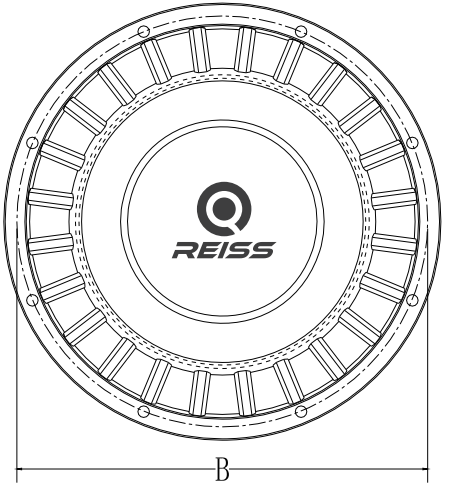

RS-SQX series subwoofers dimentions

Dimensions	Value	RS-SQX15.D1/D2	RS-SQX18.D1/D2
Diameter A	mm	395	470
Diameter B	mm	375	442
Diameter C	mm	350	422
Diameter D	mm	228	228
Depth E	mm	95	95
Depth F	mm	18	18
Depth G	mm	208	245
Depth H	mm	243	285
Vd	L	8.4	12.2

RS-SQX series subwoofer T/S Parameters

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	n	SPLo	Vas	Cms	Mms	Mmd	Xmax	Xmech	AGH
MODEL	ohm	ohm	Hz	msqM	Tm					dB	L	μm/N	g	g	±mm	mm	mm
RS-SQX15.D1	0.5	0.4	39.8	80.4	7.6	3.521	0.451	0.400	0.920	89.7	51.0	55.6	237.4	224.2	17.5	40	20
RS-SQX15.D1	2	1.6	39.4	80.4	16.1	3.584	0.437	0.390	0.823	90.2	50.8	54.1	235.1	221.9	17.5	40	20
RS-SQX15.D2	1	0.8	38.8	80.4	9.9	3.946	0.518	0.458	0.851	90.3	52.0	56.6	226.7	213.5	17.5	40	20
RS-SQX15.D2	4	3.2	38.4	80.4	19.8	4.276	0.515	0.460	0.857	90.3	52.0	56.6	226.5	213.4	17.5	40	20
RS-SQX18.D1	0.5	0.4	35.1	119.5	7.9	2.921	0.390	0.344	1.432	91.6	148.4	73.2	265.1	241.3	17.5	40	20
RS-SQX18.D1	2	1.6	36.0	119.5	14.1	4.207	0.487	0.436	1.360	91.4	147.3	72.7	269.5	245.8	17.5	40	20
RS-SQX18.D2	1	0.8	35.7	119.5	9.6	3.799	0.534	0.468	1.202	90.8	145.8	71.9	276.3	252.5	17.5	40	20
RS-SQX18.D2	4	3.2	35.5	119.5	21.7	3.440	0.428	0.380	1.457	91.7	144.3	71.2	282.7	258.9	17.5	40	20

*Above parameters are tested after each subwoofer was break-ined with 65V 50Hz input with 2ohm load (DVC1 version) and 48V 50Hz input with 1ohm load (DVC2 version) for 8 hours.

*AGH: Air Gap Height.

*Due to continuous pursuit of performance, specifications change without prior notice.

REISS

KULLANMA KILAVUZU



RS-SQX SERİSİ

38/46 CM SUBWOOFER

İTHALATÇI FİRMA & SERVİS BİLGİLERİ

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş

Mahmutbey Mah. Küçük Halkalı Cad.No:9 Bağcılar-İstanbul

Tel:0212-447 02 02 - 659 07 22

www.reissaudio.com.tr