




OWNER'S MANUAL

SUPER BULLET TWEETER

RS-TA49LED

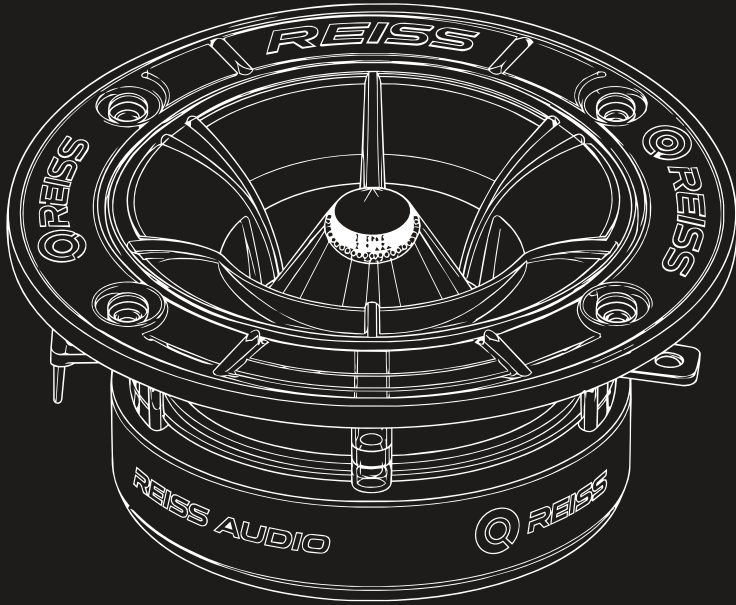

Since 1985
TURKISH ENGINEERING

LED MULTICOLOR

SUPER BULLET TWEETER

Specifications

Nominal Diameter	96mm
Nominal Impedance	6 Ω
RMS Power Handling	100 Watts
Maximum Power Handling	200 Watts
Sensitivity (1w/1m)	103dB
Frequency Response	3KHz - 20KHz
Recommended Hi Pass Crossover	3.5KHz
Voice Coil Diameter	25.9mm (1")
Voice Coil Former Material	Kapton
Winding Material	CCAW
Frame Material	Transparent Polycarbonate
Magnet Weight	Ferrite 8oz



Measurements

Overall Diameter	96mm (3.78")
Front Mount Baffle Cutout	79.5mm (3.13")
Mounting Depth	43mm (1.69")
Overall Depth	49mm (1.93")
Net Weight	0.52 Kg


Shipping Info

Gross Single Unit Weight	1.15 Kg
Single Unit Box Dimensions W x L x H	23.2 x 11.2 x 5.9 cm
Quantity of Units in Master Carton	10 pairs
Gross Master Carton Weight	11.7 Kg
Master Carton Dimensions W x L x H	25 x 24.2 x 32.2 cm

SUPER BULLET TWEETER

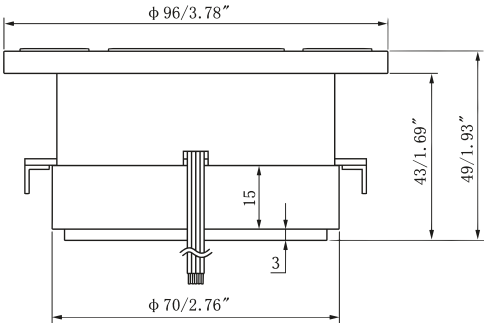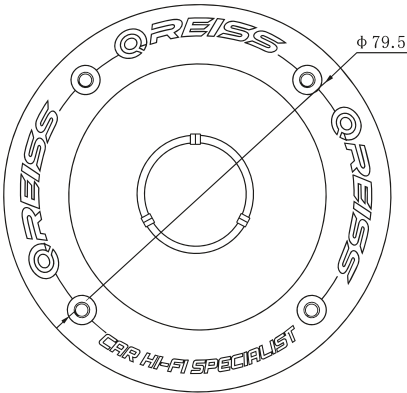

SPL vs. FREQ

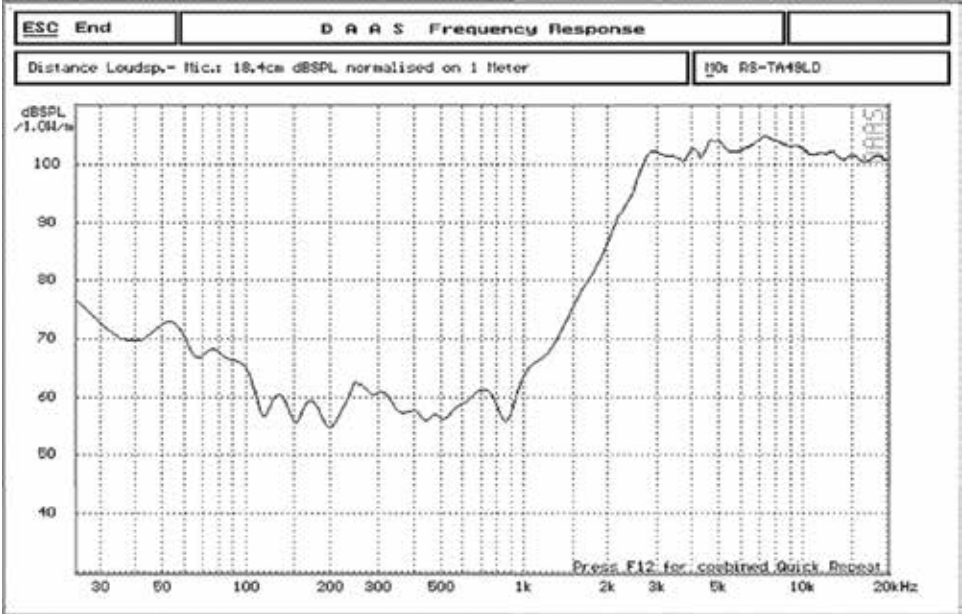



**FOR MORE INFORMATION
PLEASE VISIT**

Join Our Community



www.reissaudio.com.tr