




# OWNER'S MANUAL

## RS-HR6

HORN TWEETER

S4/S8Ω

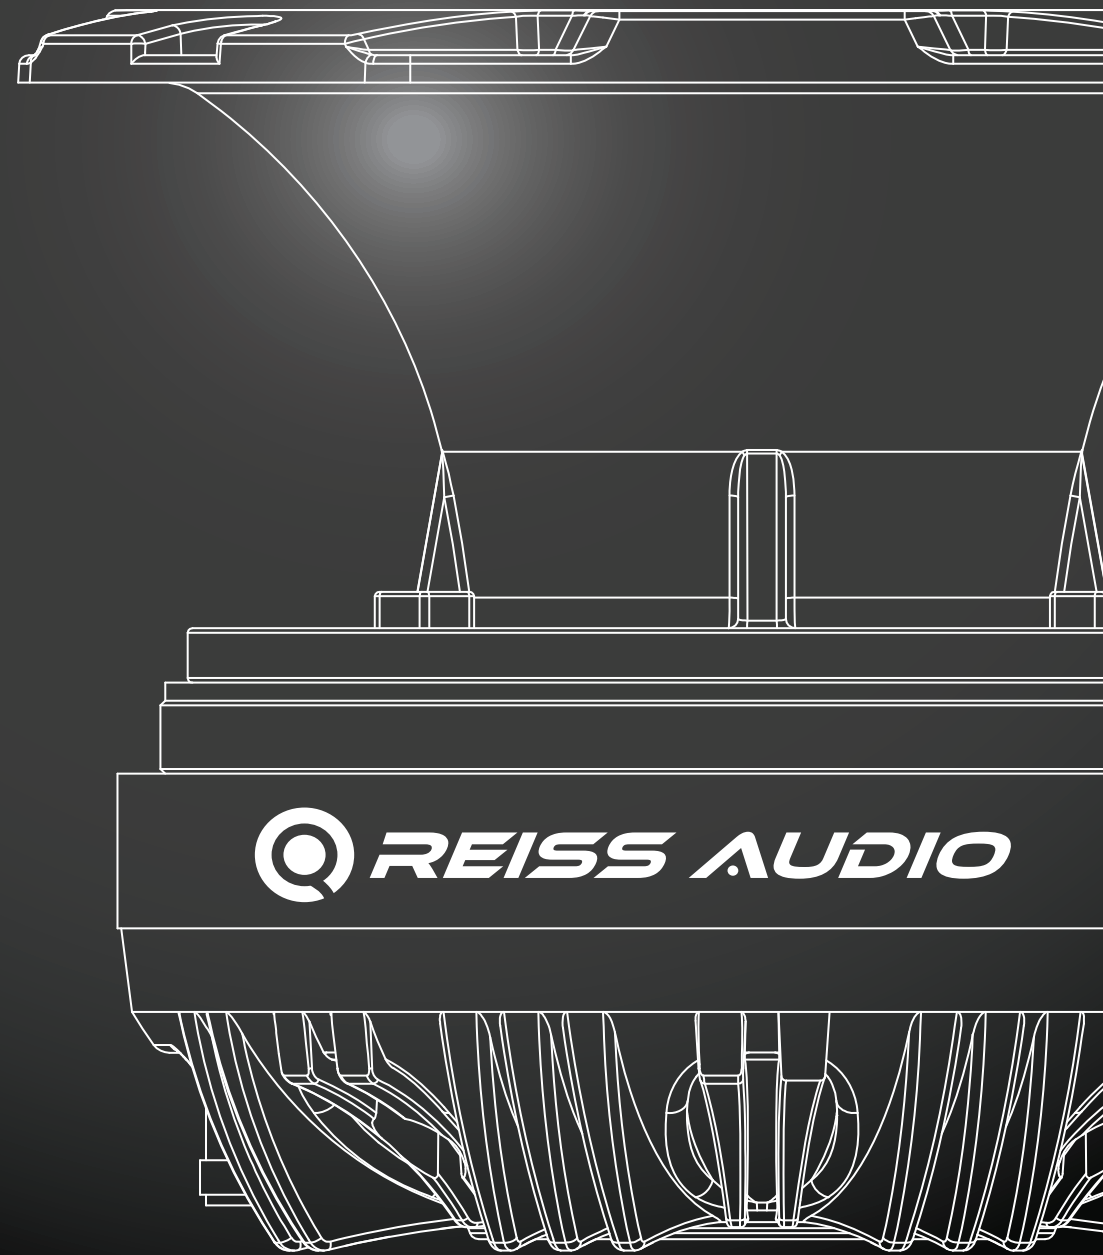

Since 1985

TURKISH ENGINEERING

### SPECIFICATION

#### General Data

Overall Dimensions	156-138	mm
Norminal Power Handling	200	w
Transient Power 10ms	400	w
Sensitivity	112	dB
Frequency Response	800-18K	Hz
Dome Material	Titanium	
Net Weight	3.3	kg

#### Electrical Data

Norminal Impedance	Single 4/8Ω	Ohm
DC Resistance	7	Ohm

#### Voice Coil and Magnet Parameters

Voice Coil Diameter	51	mm
Voice Coil Height	3	mm
HE Magnetic Gab Height	4	mm
Max.Liner Excursion		mm
Voice Coil Bobbin	Kapton	
Voice Coil Wire	CCAR	
Number of Layers	1 L	Layers
Magnet System Type	High Flux Ferrite	

#### T-S Parameters

Resonant Frequency	Fs	800	Hz
Tweeter Horn	68# 155*155*H75mm		