SOUNDMAX

TECHNICAL SPECS	
RMS Power 4Ohm	100W x 4 + 350W
RMS Power 2Ohm	160W x 4 + 650W
RMS Power 1Ohm	800W
RMS Power 4Ohm Bridged	320W x 2
THD	<0.15%
Frequency response	10Hz-45KHz
Signal to noise ratio	>90dB
Sensitivity	250mV-8V
Built-in Fuses	/
Dimensions (mm)	280x120x52

REİS ELEKTRONİK SANAYI VE TİCARET A.Ş.
Mahmutbey Mahallesi
Küçük Halkalı Caddesi No:9
Mahmutbey Bağcılar / İSTANBUL
www.reiselektronik.com.tr

SOUNDMAX



OWNER'S MANUAL

SX-LX5125.5D
5 CHANNEL AMPLIFIER

CAR AUDIO SYSTEM

PLEASE READ CAREFULLY BEFORE INSTALLING OR OPERATED THIS UNIT

WARNING

Make sure you choose a suitable place to mount the unit. The position should be completely dry with a good circulation of air, and from a mechanical point of view very stable.

Features

- Class-D digital full range 2ohm stable stereo.
- Applying new concept "Low-Heat Producing Circuit".
- Tri-mode capable.
- Channel design 5/ 4/ 3 /2 channels.
- Full MOSFET DC-DC PWM power supply.
- Double sided FR-4 PC Board.
- SMD technology.
- Ni plated RCA input connectors.
- Adjustable Low-Pass, Hi-Pass.
- Ultra slim size.

TECHNICAL SPECS	
RMS Power 4Ohm	100Wx4+350W
RMS Power 2Ohm	160Wx4+650W
RMS Power 1Ohm	800W
RMS Power 4Ohm Bridged	320Wx2
THD	<0.15%
Frequency response	10Hz-45KHz
Signal to noise ratio	>90dB
Sensitivity	250mV-8V
Built-in Fuses	/
Dimensions (mm)	280x120x52

Power Connections

It is important to have good quality power and ground connections. Remember, to complete an electrical circuit, the ground connection is just as important as the positive power connection. Before any power connections are made, disconnect the ground cable of the battery . Use 8 gauge or larger automotive grade wire if the distance from the battery to the amp is excessive. Avoid sharp or rough edges as a safeguard against short circuiting and potential fire hazards.

GND= Connect the proper gauge ground wire to the amplifier GND terminal. Locate the position on the chassis of the car where the amplifier will be grounded. Use solder or a crimped ring terminal to connect the ground wire pre-drill the prepped chassis to bolt the ground ring terminal with a nut, bolt, and lock washer Insulate the metal and the connector with paint or silicone to prevent rust and oxidation. Silicone also works great to prevent nuts and bolts from working loose in harsh environments of an automobile. Upon completion of the ground connection, grab the wire and connector to confirm the connection is solid. To prevent enginenoise, it is recommended to ground the head unit and other electronic audio devices to the same location.

Trouble shooting

SYMPTOMS	CHECK	REMEDY
NO SOUND	Is the power LED illuminated? (NO)	Check all fuses to amplifier. Be sure turn-on lead is connected Check signal leads. Check gain control. Check Tuner/Deck volume level. Clean contacts on fuse holders.
	Is the Diagnostic LED illuminated?(YES)	Check for speaker short or amplifier overheating.
AMP NOT SWITCHING ON	No power to power wire	Repair power wire or connections.
	No power to remote wire with receiver on	Check connections to radio.
	Burnt or broken fuse	Replace fuse.
NO SOUND, ON ONE CHANNEL	Check speaker leads	Inspect for short circuit or an open connection.
	Check audio leads	Reverse Left and Right RCA inputs to determine if the problem is occurring before the amp.
AMP TURNING OFF MEDIUM/ HIGH VOLUME	Check speaker load impedance	Be sure proper speaker load impedance recommendations are observed. (If you use an ohmmeter to check speaker resistance, please remember that DC resistance and AC impedance may not be the same.)
PROTECTION LAMP ON	Shut down	Turn radio down Wait for AMP to cool
	Speaker wires shorted	Separate speaker wires and insulate

Warning

Investigate the layout of your vehicle before drilling or cutting any holes. Take care when you are working near the gas tank, brake lines, hydraulic lines, and electrical wiring. Do not use the amplifier without security mounting it, as the amp or vehicle may be damaged in the event of an accident. Do not mount the amplifier where the wire connections are unprotected or are subject to pinching or damage from other vehicle components. The 12V power wire must be fused within 18" of the battery . Ensure the source unit is powered off before making any wiring connections. If you need to replace the fuses, use only the same type and size. Using a fuse of a different type or rating may result in damage to the amplifier or vehicle, which will not be covered under the manufacturer's warranty.

Mounting Your Amplifier

Choosing the best mounting location for your amplifier is crucial. The amplifier should ont be mounted to any wood, metal, or carpeted surface. The heatsink can be mounted directly to the chassis of the car, or isolated for best performance. It needs proper ventilation, so avoid mounting the amp under seats, in the engine bay, or any other area that moisture might accumulate. Be sure the mounting screws do not penetrate the fuel tank, brake lines, or any other crucial fluid lines. Never mount the amplifier to a subwoofer enclosure, as excessive vibrations can cause damage

Warning

We highly recommends that an in-line fuse or circuit breaker be installed within 18" of the battery .Although your amplifier has adequate internal protection, it is possible a damaged wire between the component and the battery may result in a fire. The in-line fuse or circuit breaker should be installed in a location that is easy to access, and all wiring should be routed safely, following the below suggestions:

-Avoid placing wires near hot or moving objects

-Always use wire grommets when routing wire through the firewall or any other metal surfaces

-Avoid the potential for damaged wires by routing all wires away from moving hinges, seats, brake& gas pedals, hood and trunk hinges, etc.

Setting the gains

It is a fact that very few people, including professional installers, know how to set gains correctly.Failure to do so yields higher distortion , a higher noise floor which decreases dynamic headroom, less than optimum operating conditions for electronic equipment, and higher failure rate for both the electronic equipment and transducers alike.


While most people set this control by ear to how loud they want their music, this is not the intent of this control. The range is from 0. 25 volts to 6 volts. The control is meant for matching the output of the source unit's signal voltage. For example, if you have a source unit with low output voltage, you would probably have the control set fairly high, towards the 0. 25V range. A lot of head units have 4 volts of output signal voltage which means that your control would be set midway through the range. If you happen to have a line driver(signal booster) that yields 6 volts or more, you will set the gain at the minimum position, towards the 6V range.

In all of these examples, when properly level matched, the amplifier will put out full volume.Setting the control above the inproper point may cause damage to the amplifier and speakers and can result in poor sound quality and overall undesirable results.

REM= Connect the remote wire (power antenna output) from the head unit to the REM terminal. If the head unit is not equipped with a remote/antenna output, locate a wire that is controlled by the accessory position of the key. It is important to have the amplifier turn off with the radio or key. If the amplifier remains on, the battery will drain.


12V= Connect the proper gauge power wire to the B+ terminal. Trace the power wire through the car to the in-line fuse or circuit breaker that is no more than 18" from the battery. Remember, the in-line fuse or circuit breaker protects the car in the event of short circuit, Connect the in-line fuse or circuit breaker to the battery, but do not install the fuse or activate the circuit breaker yet.


power connection.

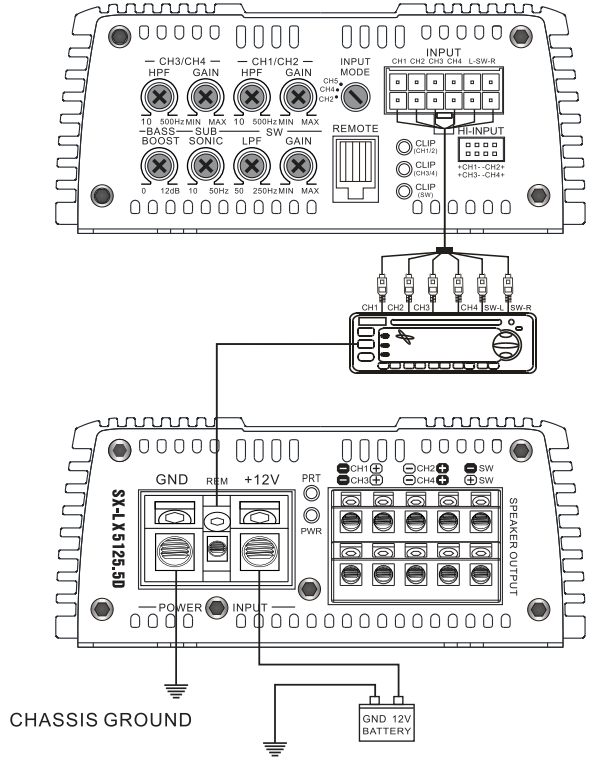

Speaker Out Connections

5CHANNEL Speaker connection

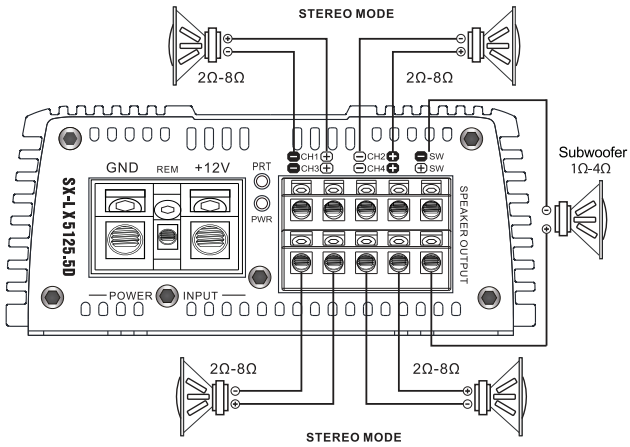

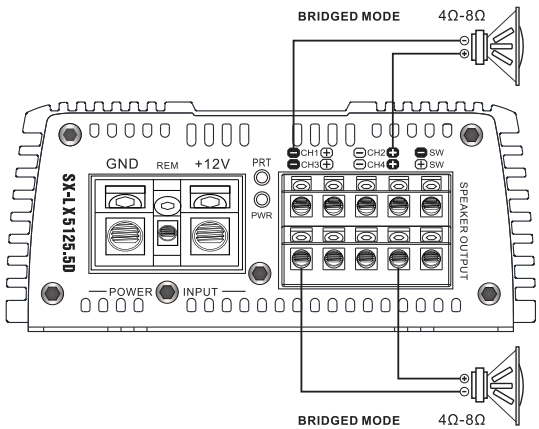

FEATURES

1. Remote Level Control Connection
Connect the remote level control to this terminal. The remote level control allows adjustment of the subwoofer level from a remote location in the vehicle.

2. Level Sensitivity
Adjust the amplifiers pre-amp sensitivity level. The minimum sensitivity level is 6V, while the maximum level is 250mV.

3.LPF/HPF Crossover
Adjust the frequency setting of the low-pass or high-pass crossover. For LPF, frequencies higher than the setting will be filtered out of the audio signal; for HPF, frequencies lower than the setting will be filtered out of the audio signal.

4. Subsonic crossover
Adjust the frequency setting of the subsonic crossover. The frequency range is 10Hz-50Hz. Frequencies lower than the setting will be filtered out of the audio signal.

5. High Level Input
Connect the speaker outputs from the head unit tot he high level input if RCA outputs are not available. NEVER use high level and RCA inputs at the same time.

6. RCA Audio Input Connection
Using high quality shielded stereo RCA cables, connect the source signal to the amplifier RCA inputs.

7.Input Mode
When the switch is on "5CH", there will only be output in the channel that has input.

8. Bass boost
Adjust the amplifiers 45Hz Bass Boost level up to 12dB.

9.Clipping
Clipping usually happens because the gain is set too high in an attempt to maximize the amp's output potential. When the gain is set too high for the application, the amp will produce a squared or clipped sound wave, and both the amp and the connected speakers will generate a large amount of heat while trying to reproduce the clipped signal. This can result in catastrophic damage to your equipment.

10. Power Protection indicator LED
When the amplifier is on and in proper working condition, the green LED will illuminate. Refer to the Troubleshooting Guide for possible solutions if the amplifier will not power on. If the amplifier activates its protection mode, the red led will illuminate Refer to the Troubleshooting Guide for possible solutions if the amplifier activates its protection mode.

Note: Remote trigger input power must be connected well tight and firmly on the remote socket ,Amplifier won't be able to turn on if its loosen or not connected.

