


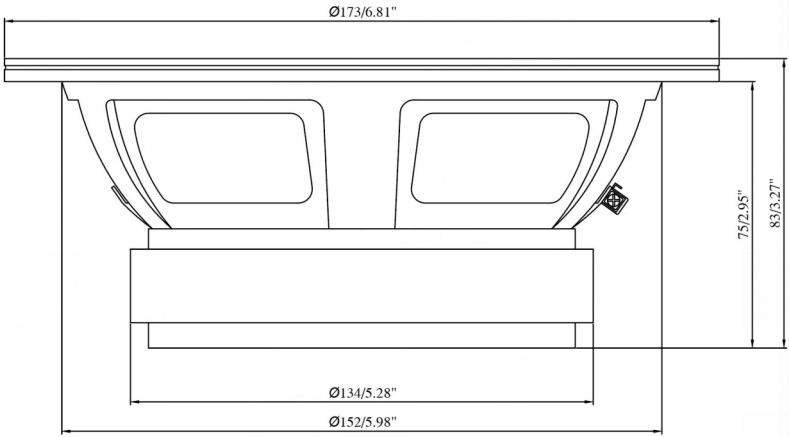

Model: RS-M6EGO
17 CM MID-RANGE SPEAKER
1.75" CCAW Voice Coil


SPECIFICATIONS

General Data			Unit	FEATURES
Overall Dimensions	173 x 83	mm		Steel Basket
Nominal Power Handling	220	W		Reinforced Pulp Paper Cone, Treated Cloth Surround
Maximum Power	440	W		Dome Paper Dust Cap
Sensitivity	94	dB		High Temperature 1.75Inch CCAW Voice Coil
Frequency Response	120~10000	Hz		Ferrite Magnet Structure
Cone Material	Pulp Paper			Dimensions 
Basket	Steel			
Net Weight	2.8	kg		
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3.2	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	44.7	mm		
Voice Coil Height	10.5	mm		
Magnetic Gap Height	7	mm		
Voice Coil Robbin	Kapton			
Number of Layers	2L			
T-S Parameters				
Suspension Compliance	139.169µM/N	Cms		
Mechanical Q Factor	4.679	Qms		
Electrical Q Factor	0.665	Qes		
Total Q Factor	0.583	Qts		
Moving Mass	10.979g	Mms		
Eq. Cas AIR Loaded	4.678L	Vas		
Resonant Frequency	128.755Hz	Fs		
Effective Piston Area	153.860cm ²	SD		

ESC End

D A A S Frequency Response

Distance Loudsp.- Mic.: 16,7cm dB SPL normalised on 1 Meter

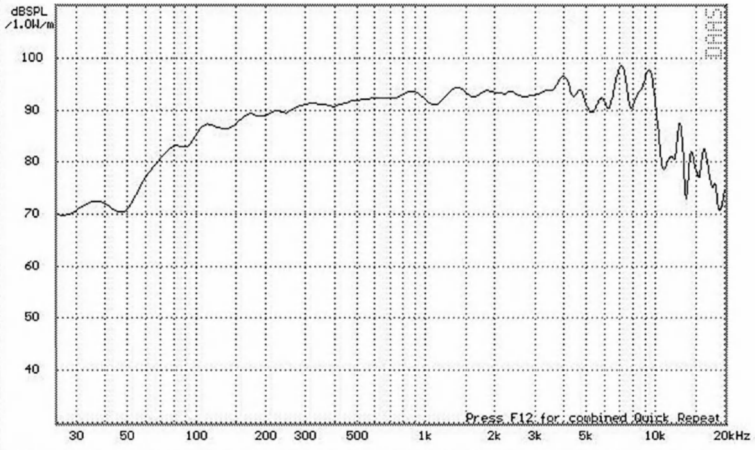

Press F12 for combined Quick Repeat